

GV-EBL2111 2MP H.264 4.3X Zoom Super Low Lux WDR IR Bullet IP Camera



- 1/2.8" progressive scan super low lux CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps at 1920 x 1080
- Intelligent IR
- Day and Night function (with removable IR-cut filter)
- Megapixel lens
- P-iris lens for auto iris control
- Motorized varifocal lens for remote focus/zoom adjustment
- Vandal resistance (IK10 for metal casing)
- Ingress protection (IP67)
- DC 12V / PoE (IEEE 802.3af)
- Wide Dynamic Range (WDR)
- 3D noise reduction
- Defog
- Motion detection
- Tampering alarm
- Text overlay
- Privacy mask
- IP address filtering
- Recording assigned by GV-Edge Recording Manager (Windows & Mac)
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF (Profile S) conformant

Introduction

The Target Bullet Camera is a light-weighted camera designed for outdoor environments. It adheres to the IP67 standard and has full protection against dust and jets of water. The camera also allows automatic and precise control of exposure using its P-iris, producing images with better clarity and contrast. With the motorized focus/zoom, users can remotely adjust the focus and zoom from the Web interface. The camera offers an entry-level surveillance solution with all the essential features and excellent image quality.

Active Tampering Alarm


Tampered



Focus Change




Camera Shift

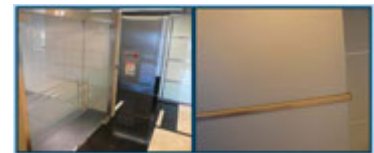

Overview

Dimensions

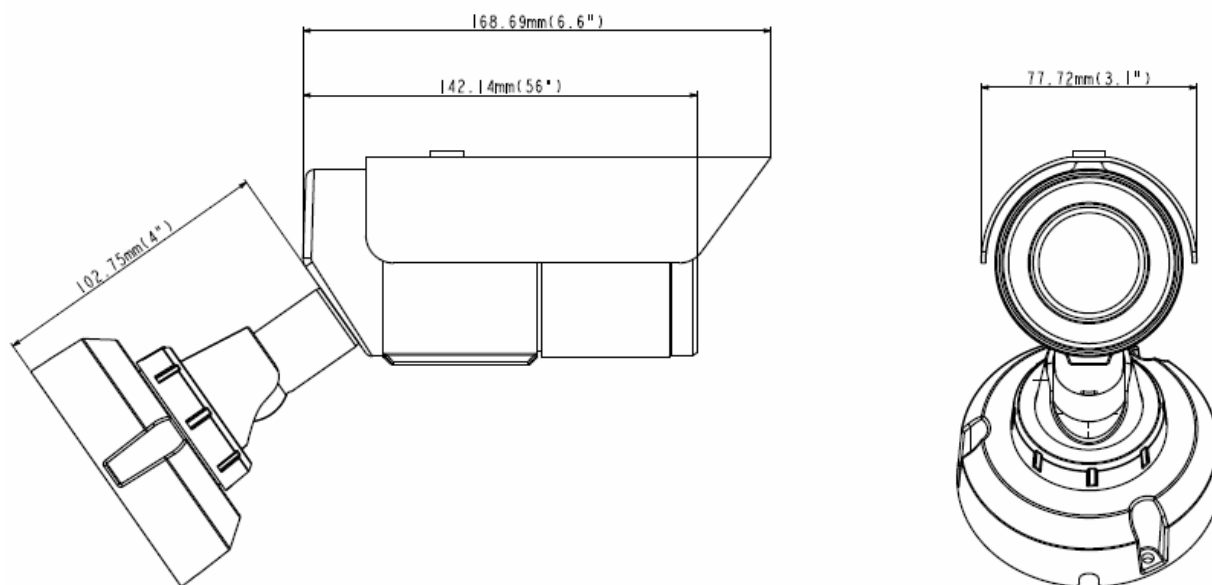

Specifications

Camera		
Image Sensor		1/2.8" progressive scan super low lux CMOS
Picture Elements		1920 (H) x 1080 (V)
Minimum Illumination	Color	0.005 Lux
	B/W	0.004 Lux
	IR ON	0 Lux
Shutter Speed		Automatic, manual (1/30 ~ 1/16000 sec.)
White Balance		Automatic, manual (2800K ~ 8500K)
Gain Control		Automatic
S/N Ratio		56 dB
WDR		Yes
Dynamic Range		Up to 72 dB
Lens		
Megapixel		Yes
Day/Night		Yes (with removable IR-cut filter)
Lens Type		Motorized varifocal lens
Focal Length		2.8 ~ 12 mm
Maximum Aperture		F/1.7
Mount		Ø14 mm
Horizontal FOV		102° ~ 40°
Image Format		1/2.7"
Operation	Focus	Auto Focus
	Zoom	4.3X Optical Zoom
	Iris	P-Iris
IR LED Quantity		24 IR LEDs
Max. IR Distance		75 m (246.06 ft)
Operation		
Video Compression		H.264, MJPEG
Video Stream		Dual streams from H.264 and MJPEG
Frame Rate		30 fps at 1920 x 1080 (60/50 Hz) *The frame rate and the performance may vary depending on the number of connections and data bitrates (different scenes).
Image Setting		Brightness, Contrast, Saturation, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Shutter Speed, D/N Sensitivity, Backlight Compensation, WDR, Defog, Denoise, Metering, Low Lux Enhancement, Zoom, Focus Change
Audio Support		N/A

Video Resolution		
Main Stream	4 : 3	1280 x 960, 640 x 480
	16 : 9	1920 x 1080 (Default), 1280 x 720
	5 : 4	1280 x 1024, 640 x 512
Sub Stream	4 : 3	640 x 480, 320 x 240
	16 : 9	640 x 360 (Default)
	5 : 4	640 x 512, 320 x 256
Network		
Interface		10/100 Ethernet
Protocol		DHCP, DynDNS, FTP, HTTP, HTTPS, NTP, ONVIF (Profile S), PSIA, QoS (DSCP), RTSP, SNMP, SMTP, TCP, UDP, UPnP, 3GPP/ISMA
Mechanical		
Temperature Detector		Yes
Camera Angle Adjustment	Pan	0° ~ 360°
	Tilt	90° ~ 180°
Connectors	Power	2-pin terminal block, PoE
	Ethernet	Ethernet (10/100 Base-T), RJ-45 cable
General		
Environment Temperature	Start-up	-20°C ~ 50°C (-4°F ~ 122°F)
	Operation	
Humidity		10% to 90% (no condensation)
Power Source		12V DC / PoE (IEEE 802.3af)
Max. Power Consumption		12.3 W
Dimensions		142.14 x 77.72 x 102.75 mm (5.6" x 3.06" x 4.05")
Weight		810 g (1.79 lb)
Ingress Protection		IP67
Vandal Resistance		IK10 for metal casing
Regulatory		CE, FCC, RCM, RoHS compliant
Power over Ethernet		
PoE Standard		PoE (IEEE 802.3af Power over Ethernet / PD)
PoE Power Supply Type		End-Span and Mid-Span
PoE Power Output		Per Port 48V DC, 350mA, Max. 15.4 watts
Web Interface		
Installation Management		Web-based configuration
Maintenance		Firmware upgrade through Web Browser or Utility
Access from Web Browser		Camera Live View, Video Recording, Change Video Quality, Bandwidth Control, Image Snapshot, Picture in Picture, Picture and Picture, Privacy Mask, Tampering Alarm, Text Overlay, Digital PTZ
Language		Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish
Application		
Network Storage		GV-System (GV-DVR/NVR), GV-Recording Server, GV-VMS
Smart Device Access		GV-Eye for iOS and Android
Live Viewing		Browser (IE, Chrome, Firefox, Safari), Mobile app
CMS Server support		GV-Control Center, GV-Center V2, GV-Vital Sign Monitor

Note:



- The signal range and data throughput may vary depending on the network conditions and environmental factors.
- Specifications are subject to change without notice.

Packing List

- | | |
|-----------------------------------|---------------------------------|
| 1. Target Bullet Camera | 9. Terminal Block |
| 2. Sun-shield Cover | 10. Screw for Mounting Kit x 3 |
| 3. Screw for Sun-shield Cover x 2 | 11. Nut for Mounting Kit x 3 |
| 4. Screw for Supporting Rack x 3 | 12. Hex Key |
| 5. Screw Anchor x 3 | 13. GV-IPCAM H.264 Software DVD |
| 6. Silica Gel Bag x 2 | 14. GV-NVR Software DVD |
| 7. Washer x 2 | 15. Warranty Card |
| 8. RJ45 Connector | |

Note: The power adapter can be purchased upon request.

Accessories

Name	Details
GV-Mount300 Convex Corner Adapter Kit 	Dimensions: 238.6 x 409.5 mm (9.4" x 16.1") Weight: 4.27 kg (9.41 lb)
GV-Mount310 Concave Corner Adapter Kit 	Dimensions: 123.3 x 393.1 mm (4.9" x 15.5") Weight: 2.96 kg (6.53 lb)
GV-Mount400 Pole Mount Bracket Kit (Ø 4" ~ 6") 	Bracket: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: Ø 4" ~ 6"
GV-Mount410 Pole Mount Bracket Kit (Ø 6" ~ 7.5") 	Bracket: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: Ø 6" ~ 7.5"
GV-PA191 PoE Adapter 	Dimensions (H x W x D): 43 x 69 x 40 mm (1.69" x 2.72" x 1.57") Weight: 130 g (0.29 lb)
Power Adapter	Contact your sales representative for the countries and areas supported.
GV-POE Switch	The GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.